



ANTHRACITE FILTER MEDIA



ADVANTAGES

- **Superior Filtration:** Anthracite filter media offers excellent particle removal capabilities, ensuring significant reduction in turbidity.
- **Extended Lifespan:** Long-lasting durability and resistance to media compaction result in a prolonged filter bed life.
- **Chemical Inertness:** Resistant to chemical reactions, ensuring the media's stability in various water treatment applications.
- **Cost-Effective:** Lower maintenance and replacement costs due to extended media life and efficient filtration.
- **Wide Range of Applications:** Suitable for a variety of water treatment processes, including municipal, industrial, and commercial systems.

PHYSICAL PROPERTIES

- Color: Black
- Effective Size: 0.6 - 0.8 mm
- Uniformity Coefficient (UC): < 1.6
- Carbon Content: 85 - 90 %
- Sulphur Content: 0.85
- Ash Content: 7 % Max
- Bulk Density: 850 Kg/m³
- Specific Gravity: 1.4 - 1.6 g/cm³
- Hardness: 3 - 4 (Mohs Scale)
- Acid Solubility: < 1 %
- Moisture Content: < 1 %
- Caustic Solubility: < 1 %
- Abrasion Loss: < 3 %
- Apparent Porosity: > 50 %
- pH Range: 6 - 9
- Meets AWWA Standard B100-01


CONDITIONS FOR OPERATIONS

- Recommended Bed Depth: 18 - 30 inches
- Backwash Flow Rate: 15 - 25 (m/h)
- Service Flow Rate: 5 - 15 (m/h)
- Maximum Temperature: 150°C (302°F)
- Maximum Operating Pressure: 75 psi (5.2 bar)



STORAGE AND MATERIAL HANDLING INSTRUCTIONS

- Storage: Store anthracite filter media in a dry, well-ventilated area, away from direct sunlight and moisture.
- Material Handling: When handling anthracite filter media, wear appropriate personal protective equipment (PPE), including gloves and eye protection.
- Avoid inhalation of dust by using respiratory protection when necessary.
- Avoid dropping or subjecting the media to impact during transportation and handling to prevent breakage.

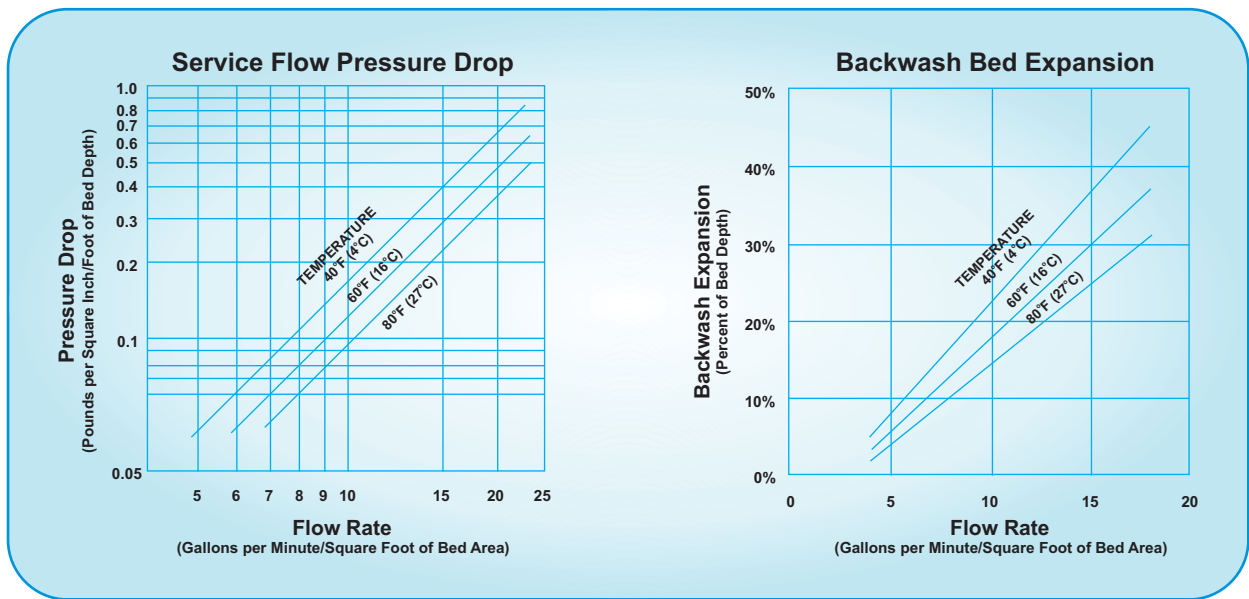

ORDERING INFORMATION

Description	Cu.Ft / Bag	Wt. / Cu.Ft	Bags / Pallet	Weight / Pallet	Pallet Dimensions
Anthracite 0.6 - 0.8 mm	1	25 Kgs	20	515 Kgs	45" x 45" x 30"

- *Weight Per Cubic Foot is Approximate.
- * Custom Sizes Available Upon Request.

The information and recommendations provided in this publication are based on data that we believe to be reliable. These recommendations are made in good faith but do not constitute any warranty or performance guarantee. Given that conditions and methods of using our products are beyond our control, STARKE does not provide any express or implied warranties concerning this product, including, but not limited to, any implied warranty of merchantability or fitness for a particular purpose. We advise the user to determine the suitability and performance of our products by conducting tests with their own equipment.

Please note that specifications may change without prior notice.